

EL[®]MARK

The Brand of Electricity

TWO & FOUR LINES TRACK LIGHTS SKY TLR



Technical data:

- Rated voltage: 230V/ 50-60Hz
- Power: 10W; 15W
- Power supply: Control gear; DC device- driver, included in the set
- Colour temperature: 2700K; 4000K; 6400K
- Type of LED: COB
- Colour: White; Black; Grey
- Body: Aluminium
- Beam angle: 24°
- Colour rendering index: Ra≥80
- Switch on/off: >20 000
- Long life: 30 000h
- Protection against dust and moisture: IP40

Features:

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission

Area of application:

- Commercial sites
- Administrative buildings
- Banks
- Hospitals
- Schools
- Entertainment and leisure spots

TECHNICAL SPECIFICATION

INDOOR- SPOTLIGHTS

ELMARK[®]

The Brand of Electricity

Variants and Dimensions:



TWO LINES SKY TLR

- SKY TLR 10W

Watt	Whole fixture lumens	Colour temp.	Beam angle	Colour body	Size (mm)		Catalogue number
					Diameter	Height	
10	900	4000	24°	White	142	105	93TLS503W/WH
10	900	2700	24°	White	142	105	93TLS503WW/WH
10	900	6400	24°	White	142	105	93TLS503CW/WH
10	900	4000	24°	Black	142	105	93TLS503W/BL
10	900	2700	24°	Black	142	105	93TLS503WW/BL
10	900	6400	24°	Black	142	105	93TLS503CW/BL
10	900	4000	24°	Grey	142	105	93TLS503W/GR
10	900	2700	24°	Grey	142	105	93TLS503WW/GR
10	900	6400	24°	Grey	142	105	93TLS503CW/GR

TECHNICAL SPECIFICATION

INDOOR- SPOTLIGHTS

ELMARK[®]

The Brand of Electricity

- SKY TLR 15W

Watt	Whole fixture lumens	Colour temp.	Beam angle	Colour body	Size (mm)		Catalogue number
					Diameter	Height	
(W)	(lm)	(K)					
15	1350	4000	24°	White	142	105	93TLS504W/WH
15	1350	2700	24°	White	142	105	93TLS504WW/WH
15	1350	6400	24°	White	142	105	93TLS504CW/WH
15	1350	4000	24°	Black	142	105	93TLS504W/BL
15	1350	2700	24°	Black	142	105	93TLS504WW/BL
15	1350	6400	24°	Black	142	105	93TLS504CW/BL
15	1350	4000	24°	Grey	142	105	93TLS504W/GR
15	1350	2700	24°	Grey	142	105	93TLS504WW/GR
15	1350	6400	24°	Grey	142	105	93TLS504CW/GR

FOUR LINES SKY TLR

- SKY TLR 10W

Watt	Whole fixture lumens	Colour temp.	Beam angle	Colour body	Size (mm)		Catalogue number
					Diameter	Height	
(W)	(lm)	(K)					
10	900	4000	24°	White	142	105	934TLS503W/WH
10	900	2700	24°	White	142	105	934TLS503WW/WH
10	900	6400	24°	White	142	105	934TLS503CW/WH
10	900	4000	24°	Black	142	105	934TLS503W/BL
10	900	2700	24°	Black	142	105	934TLS503WW/BL
10	900	6400	24°	Black	142	105	934TLS503CW/BL

TECHNICAL SPECIFICATION


INDOOR- SPOTLIGHTS

ELMARK[®]

The Brand of Electricity

- SKY TLR 15W

Watt	Whole fixture lumens	Colour temp.	Beam angle	Colour body	Size (mm)		Catalogue number
					Diameter	Height	
(W)	(lm)	(K)					
15	1350	4000	24°	White	142	105	934TLS504W/WH
15	1350	2700	24°	White	142	105	934TLS504WW/WH
15	1350	6400	24°	White	142	105	934TLS504CW/WH
15	1350	4000	24°	Black	142	105	934TLS504W/BL
15	1350	2700	24°	Black	142	105	934TLS504WW/BL
15	1350	6400	24°	Black	142	105	934TLS504CW/BL

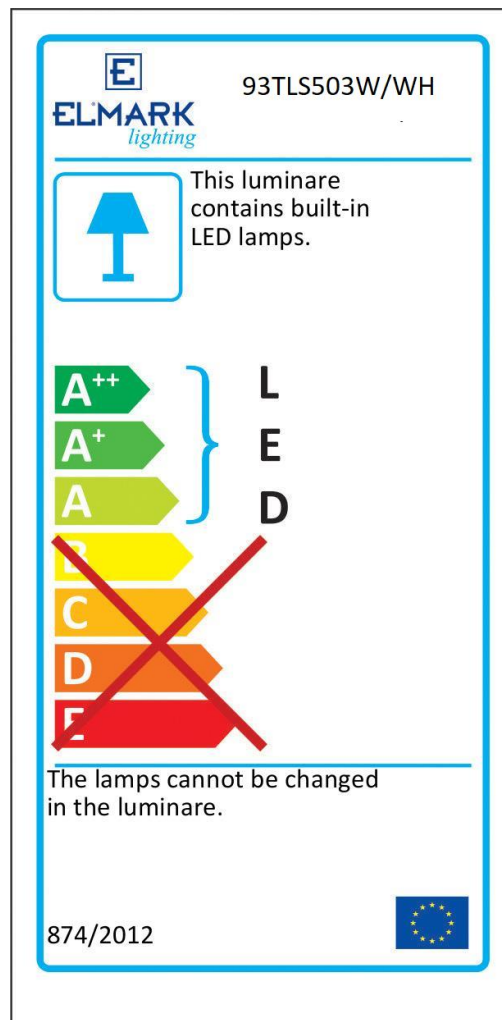

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4



www.elmarkholding.eu