

COMERCIAL LED FIXTURES

TRITON



Technical data

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	26W; 38W; 50W; 64W
<i>Power supply:</i>	Control gear; DC device- driver, included in the set
<i>Colour temperature:</i>	3000K; 4000K; 6500K
<i>Type of LED:</i>	SMD
<i>Colour:</i>	Grey
<i>Body:</i>	Aluminium
<i>Reflector:</i>	Polycarbonate (PC)
<i>Beam angle:</i>	90°
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>15 000
<i>Long life:</i>	20 000h
<i>Protection against dust and moisture:</i>	IP40


Features

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission

Area of application

- Commercial sites
- Residence buildings
- Domestic lightings

Variants and Dimensions

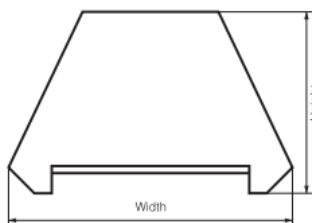

Watt	Whole fixture lumens	Colour temp.	Size (mm)			Catalogue number
			Length	Width1	Width2	
26	2860	3000	600	90	57.6	99TR602630/GR
26	2860	4000	600	90	57.6	99TR602640/GR
26	2860	6500	600	90	57.6	99TR602665/GR
38	4180	3000	900	90	57.6	99TR903830/GR
38	4180	4000	900	90	57.6	99TR903840/GR
38	4180	6500	900	90	57.6	99TR903865/GR
50	5500	3000	1200	90	57.6	99TR1205030/GR
50	5500	4000	1200	90	57.6	99TR1205040/GR
50	5500	6500	1200	90	57.6	99TR1205065/GR
64	7040	3000	1500	90	57.6	99TR1506430/GR
64	7040	4000	1500	90	57.6	99TR1506440/GR
64	7040	6500	1500	90	57.6	99TR1506465/GR


- **Installation accessories for LED PROFILES**

Suspension wire

Catalogue number: 99ACC54



Energy efficiency

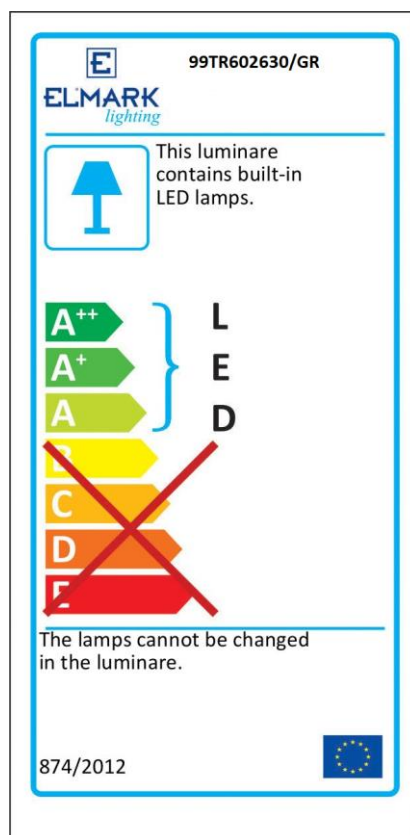

Standards

• EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

