

# ELMARK<sup>®</sup>

The Brand of Electricity

## HIGH POWER LED PROFILES S36

## SERIES SURFACE MOUNTING



### GENERAL INFORMATION »

- ∴ Rated voltage: 230V/ 50-60Hz
- ∴ Power: 20W; 40W; 50W
- ∴ Power supply: 42V SELV driver
- ∴ Colour temperature: 4000K
- ∴ Light Source: SAMSUNG
- ∴ Colour: White; Black; Grey
- ∴ Body: Aluminium
- ∴ Reflector: Polycarbonate (PC)
- ∴ Beam angle: 90°
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off: >15 000
- ∴ Long life: 20 000h
- ∴ Protection against dust and moisture: IP40


### FEATURES »

- ∴ Elegant and practical luminaires
- ∴ Pleasant and uniform light distribution
- ∴ Best alternate For LED tubelites with decorative and aesthetic look
- ∴ Low power consumption
- ∴ Repeated switch on/off does not affect the lifespan
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration-free body
- ∴ Low heat emission
- ∴ Suitable for commercial sites, residence buildings, banks, offices

## PRODUCT DETAILS »

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)
99SM36S4020/BL	99SM36S4020/WH	99SM36S4020/GR	20	1600	4000
99SM36S4040/BL	99SM36S4040/WH	99SM36S4040/GR	40	3200	4000
99SM36S4050/BL	99SM36S4050/WH	99SM36S4050/GR	50	4000	4000

## DIMENSIONS »

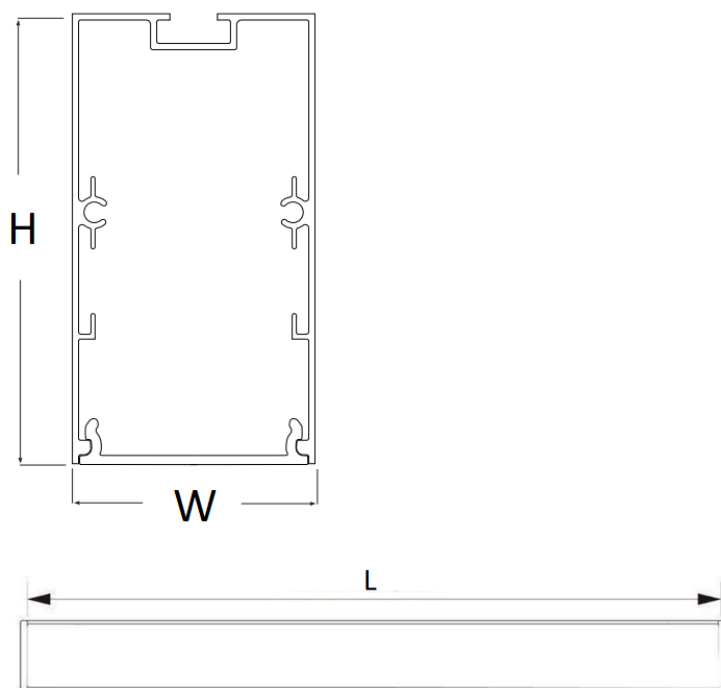

## Installation accessories »

Connector

- Catalogue number: 99ACC50

Suspension wire

- Catalogue number: 99ACC51


Suspension wire with console

- Catalogue number: 99ACC52



Model	Length (mm)	Width (mm)	Height (mm)
20W	600	35.6	65.64
40W	1200	35.6	65.64
50W	1500	35.6	65.64


ADDITIONAL INFORMATION »




**ELMARK**  
*lighting*

99SM36S4020/BL

---




This luminaire contains built-in LED lamps.



---

The lamps cannot be changed in the luminaire.

874/2012



Model	Packing/Box (pcs)
LED PROFILE 20W	1/1
LED PROFILE 40W	1/1
LED PROFILE 50W	1/1

