

EL[®]MARK

The Brand of Electricity

LED LAMPS R7s

GENERAL INFORMATION »

- ∴ Rated voltage: 230V; 50-60Hz
- ∴ Power: 3,2W; 7,5W
- ∴ Colour temperature: 2700/4000/6500 settable
Lamp holder: R7s
- ∴ Beam angle: 360°
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off: >20 000
- ∴ Average life: 30 000h
- ∴ Protection degree: IP20
- ∴ No dimmable

FEATURES »

- ∴ Lower maintenance cost thanks to longer lifetime
- ∴ Reduced operational cost thanks to lower energy consumption.
- ∴ Mercury free.
- ∴ Maximum resistance to switching loads.
- ∴ Instant-on light.

AREAS OF APPLICATION »

- ∴ General illumination
- ∴ Domestic applications
- ∴ Hospitality
- ∴ Outdoor applications only in suitable luminaires




TECHNICAL SPECIFICATION SHEET

PRODUCT DETAILS »

Catalogue number	Type	Watt (W)	Lamp holder	LED lamp lumens (lm)	Beam angle	Colour temp. (K)
99LED443/CCT	LED R7s	3,2	R7s	400	360°	2700/4000/6500 settable
99LED444/CCT	LED R7s	7,5	R7s	850	360°	2700/4000/6500 settable

DIMENSIONS »

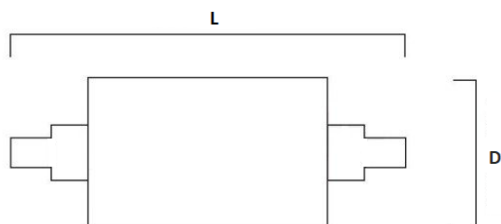

Catalogue number	Diameter (mm)	Length (mm)
99LED443/CCT	22	78
99LED444/CCT	22	118

ADDITIONAL INFORMATION »



Catalogue number	Barcode	Packing/Box (pcs)
99LED443/CCT	8031874221675	1/50
99LED444/CCT	8031874221682	1/50

