

## LED LAMP G4



### ***Technical data***

<i>Voltage:</i>	230V
<i>Power:</i>	3W; 5W
<i>Colour temperature:</i>	2700K; 4000K;
<i>Lamp holder:</i>	G4
<i>Beam angle:</i>	300°
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>30 000
<i>Average life:</i>	20 000h

## **Features**

- *Reduced operational cost thanks to lower energy consumption.*
- *Mercury free.*
- *Maximum resistance to switching loads.*
- *Correct operation even at low temperature.*
- *Instant-on light.*

## **Area of application**

- *Domestic applications*
- *Chandeliers*
- *Outdoor applications only in suitable luminaires*

## **Variants and Dimensions**


<i>Watt</i>	<i>LED lamp lumens</i>	<i>Colour temp.</i>	<i>Lamp holder</i>	<i>Size (mm)</i>		<i>Catalogue number</i>
<b>(W)</b>	<b>(lm)</b>	<b>(K)</b>		<b>Length</b>	<b>Diameter</b>	
<b>3</b>	300	2700	G4	46	15	<b>99LED782</b>
<b>3</b>	300	4000	G4	46	15	<b>99LED783</b>
<b>5</b>	380	2700	G4	50	15	<b>99LED784</b>
<b>5</b>	380	4000	G4	50	15	<b>99LED785</b>

# TECHNICAL SPECIFICATION

## Barcodes

3800131202000	99LED782
3800131202017	99LED783
3800131202024	99LED784
3800131202031	99LED785

## Energy efficiency

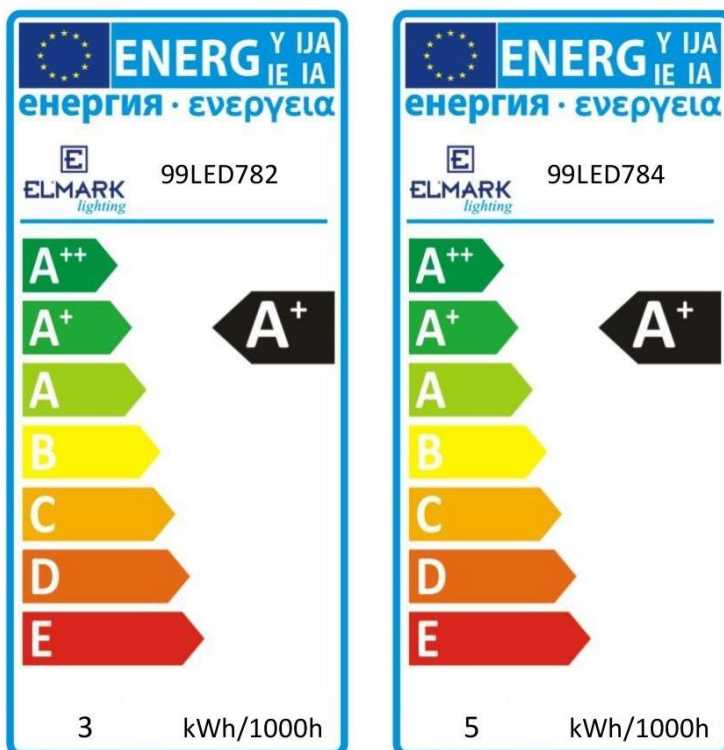

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

