

LED LAMP T30



Technical data

<i>Voltage:</i>	230V; 50Hz
<i>Power:</i>	4W
<i>Colour temperature:</i>	2700K; 4000K;
<i>LEDs:</i>	27pcs SMD5050
<i>Lamp holder:</i>	G9
<i>Beam angle:</i>	300°
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>30 000
<i>Average life:</i>	20 000h


Features

- o *Reduced operational cost thanks to lower energy consumption.*
- o *Mercury free.*
- o *Maximum resistance to switching loads.*
- o *Correct operation even at low temperature.*
- o *Instant-on light.*

Area of application


- o *General illumination*
- o *Domestic applications*
- o *Chandeliers*
- o *Outdoor applications only in suitable luminaires*

Variants and Dimensions

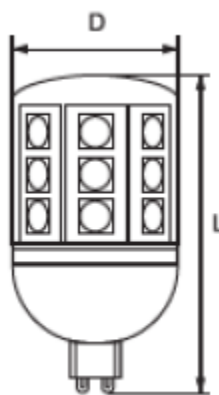

Watt	LED lamp lumens	Colour temp.	Lamp holder	Size (mm)		Catalogue number
(W)	(lm)	(K)		Length	Diameter	
4	320	4000	G9	69	31	99LED512
4	320	2700	G9	69	31	99LED513

Energy efficiency

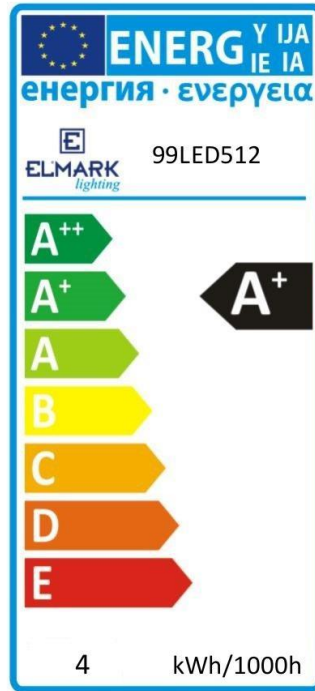

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

