

LED LAMP LED50SMD3014 GU10



Technical data

<i>Rated voltage:</i>	230V; 50-60Hz
<i>Power:</i>	5.5W;
<i>Colour temperature:</i>	2700K; 4000K;
<i>LED type:</i>	SMD3014
<i>LED source:</i>	Epistar
<i>Base:</i>	GU10
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>20 000
<i>Average life:</i>	30 000h
<i>Power factor:</i>	$\lambda > 0.8$
<i>Starting time:</i>	< 0.5s


Features

- o Lower maintenance cost thanks to longer lifetime
- o Reduced operational cost thanks to lower energy consumption.
- o Mercury free.
- o Maximum resistance to switching loads.
- o Correct operation even at low temperature.
- o Instant-on light.

Area of application

- o General illumination
- o Domestic applications
- o Outdoor applications only in suitable luminaires


Variants and Dimensions

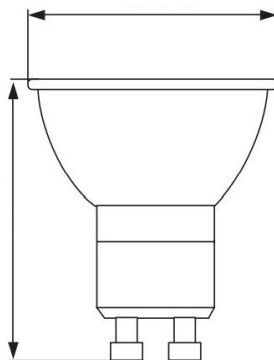

Watt	Whole fixture lumens	Colour temp.	Base	Beam angle	Size (mm)		Catalogue number
(W)	(lm)	(K)			Length	Diameter	
5.5	400	4000	GU10	120°	55	50	99LED415
5.5	400	2700	GU10	120°	55	50	99LED416

TECHNICAL SPECIFICATION

Energy efficiency

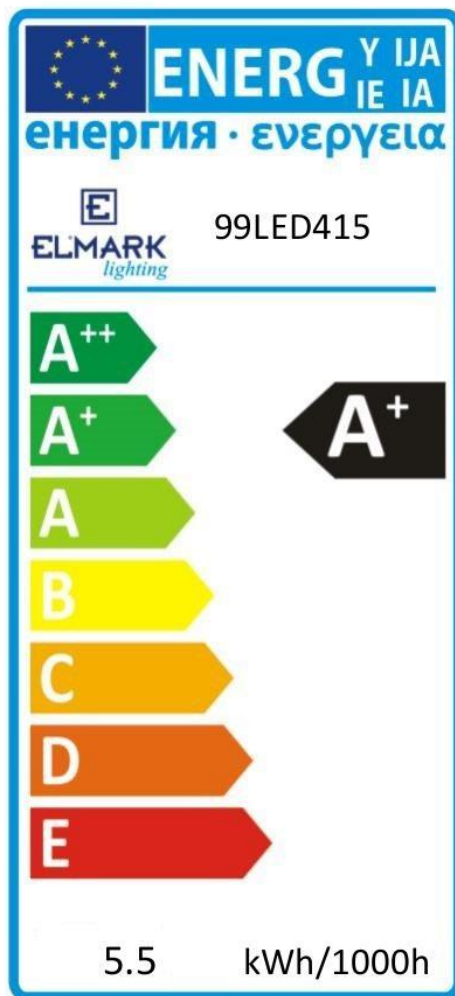

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

