



LED HIGH BAY FIXTURES ALHENA 16



Technical data

| Lamp power: | 30W; 40W; 50W | | | |
|---------------------------------------|--|--|--|--|
| Rated voltage: | 230VAC/ 50-60Hz | | | |
| Light source type: | LED Lamp | | | |
| Lamp LED chip type: | SMD2835 | | | |
| Luminous flux: | 2700lm (30W); 3600lm (40W); 4500lm (50W) | | | |
| Colour temperature: | 4000-4300K | | | |
| Lampholder type: | E27 | | | |
| Beam angle: | 120° | | | |
| Colour of the housing: | grey | | | |
| Size: | D400mm | | | |
| Reflector: | Polycarbonate | | | |
| Installation: | Ceiling mounting | | | |
| Protection against dust and moisture: | IP64 | | | |

TECHNICAL SPECIFICATION



Product benefits

- Efficient replacement of metal halide high bay fixtures
- Safety- low voltage operation
- Homogenous and flicker-free light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan of the fixture
- Instant light at maximum luminous flux
- Environmentally friendly no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body

Application area

- Commercial
- Sports buildings
- Warehouses
- Production halls


Variants and dimensions

| Model | Watt | Lamp | Lamp holder | Size (mm) | | Catalogue number |
|----------------------------|------|------|----------------|--------------|----------|---------------------|
| | | | | Height | Diameter | |
| LED HIGH BAY ALHENA 16 30W | 30W | LED | E27 | 300 | 400 | 98AL1630 |
| LED HIGH BAY ALHENA 16 40W | 40W | LED | E27 | 300 | 400 | 98AL1640 |
| LED HIGH BAY ALHENA 16 50W | 50W | LED | E27 | 300 | 400 | 98AL1650 |

TECHNICAL SPECIFICATION



Energy efficiency

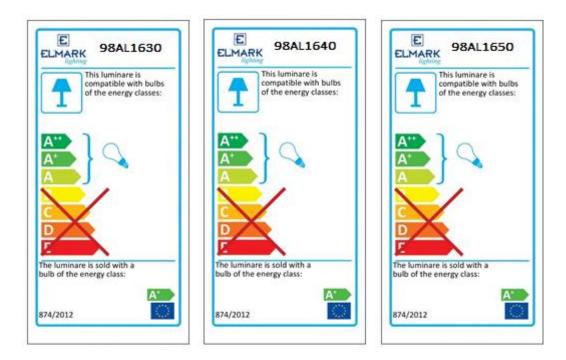

Standards

• EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

