

## OUTDOOR LED AREA LIGHTING

### LINEAR RGB



#### Technical data

<i>Rated voltage:</i>	DC 24V
<i>Power:</i>	18W; 36W;
<i>LED driver:</i>	Mounting in the body
<i>Colour temperature:</i>	RGB
<i>LED source:</i>	SMD2835
<i>Colour body:</i>	Silver
<i>Housing:</i>	Aluminium body
<i>Colour rendering index:</i>	Ra > 70
<i>Average lifetime:</i>	25 000h
<i>Ambient temperature:</i>	-30°C ÷ +65°C
<i>Rubber cable:</i>	300mm
<i>Protection against dust and moisture:</i>	IP67

## Features

- Provides different combinations of colored light
- Wide distribution of even and stable light
- Economic - low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body


## Areas of application

- Sports halls
- Commercial areas
- Warehouses
- Production facilities
- Squares, fleets
- Parking lots

## Variants and Dimensions

Watt	Colour temp. (k)	Colour body	Size (mm)			Catalogue number
			Length	Width	Height	
18W	RGB	Silver	1000	25	33	98LINEAR18RGB
36W	RGB	Silver	1000	65	62	98LINEAR36RGB

## Energy efficiency

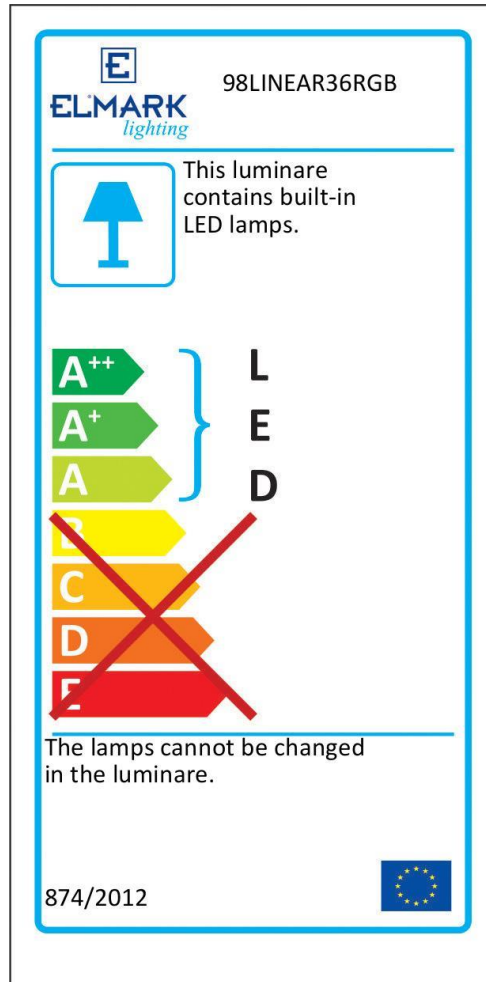

## Barcodes

3800131202369	98LINEAR18RGB
3800131202376	98LINEAR36RGB

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 • 60598-2-5 •

