

## OUTDOOR LED AREA LIGHTING LINEAR



### Technical data

<i>Rated voltage:</i>	220-240V/ 50-60Hz
<i>Power:</i>	12W; 24W; 30W;
<i>LED driver:</i>	Mounting in the body
<i>Colour temperature:</i>	4000K
<i>LED source:</i>	SMD2835
<i>Colour body:</i>	Grey
<i>Housing:</i>	Aluminium body
<i>Colour rendering index:</i>	Ra > 70
<i>Average lifetime:</i>	25 000h
<i>Ambient temperature:</i>	-30°C ÷ +65°C
<i>Rubber cable:</i>	300mm
<i>Protection against dust and moisture:</i>	IP67

## Features

- Efficient replacement of traditional halogen and metal-halide floodlights
- Wide distribution of even and stable light
- Economic - low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body


## Areas of application

- Sports halls
- Commercial areas
- Warehouses
- Production facilities
- Squares, fleets
- Parking lots

## Variants and Dimensions

Watt	Whole fixture lumens (lm)	Colour temp. (k)	Colour body	Size (mm)			Catalogue number
				Length	Width	Height	
12W	960	4000	grey	500	25	33	98LINEAR12
24W	1920	4000	grey	1000	25	33	98LINEAR24
30W	2400	4000	grey	1000	30	48	98LINEAR30

## Energy efficiency

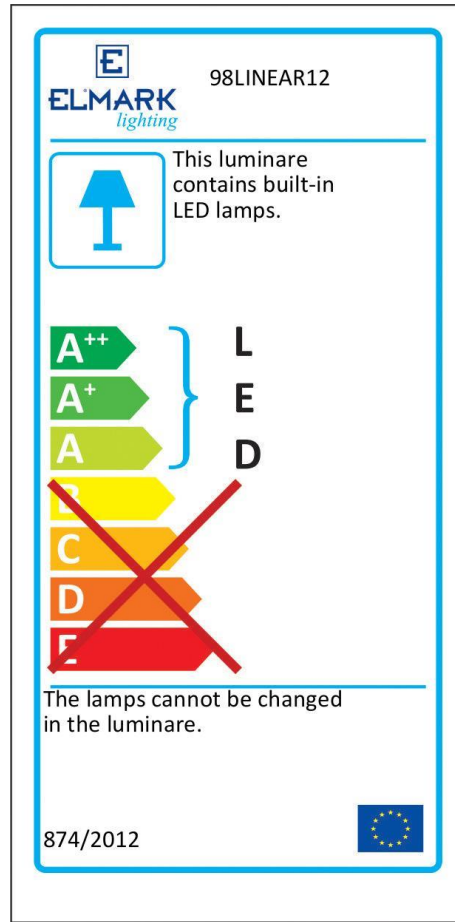

## Barcodes

3800131202345	98LINEAR12
3800131202352	98LINEAR24
3800131202338	98LINEAR30

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 • 60598-2-5 •

