

ELMARK[®]

The Brand of Electricity

VEGA SLIM



TECHNICAL SPECIFICATION

OUTDOOR- LED FLOODLIGHTS

ELMARK[®]

The Brand of Electricity

Technical data:

- Rated voltage: 220-240V/ 50-60Hz
- Power: 150W; 200W
- LED driver: Linear- mounting in the body
- Colour temperature: 5500K
- LED source: SANAN
- Colour: Black
- Body: Plastic+ Aluminium
- Cable length: 300mm
- Beam angle: 110°
- Colour rendering index: Ra> 70
- Average lifetime: 20 000h
- Ambient temperature: -30°C÷ +65°C
- Protection against dust and moisture: IP65

Features:

- Efficient replacement of traditional halogen and metal-halide floodlights
- Wide distribution of even and stable light
- Economic - low power consumption
- Repeated switch on/off does not affect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Voltage supply fluctuations do not affect the normal operation of the floodlights

TECHNICAL SPECIFICATION

OUTDOOR- LED FLOODLIGHTS


ELMARK

The Brand of Electricity

Area of application:

- Sports halls
- Commercial areas
- Warehouses
- Production facilities
- Squares
- Parking lots

Variants and Dimensions:

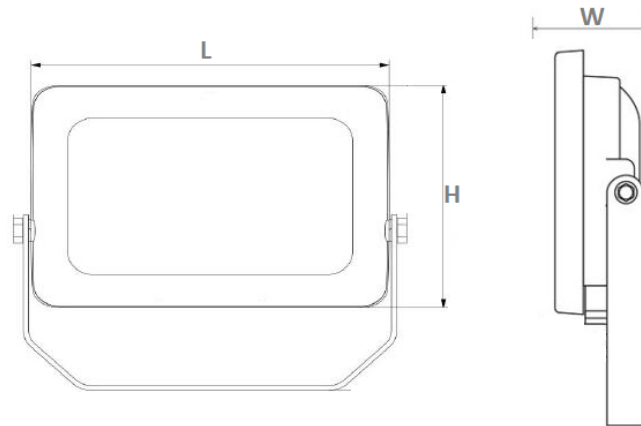

Model	Watt	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size (mm)			Catalogue number
	(W)				Length	Width	Height	
VEGA150SLIM	150	15000	5500	Black	320	400	85	98VEGA150SLIM
VEGA200SLIM	200	20000	5500	Black	320	400	85	98VEGA200SLIM

Accessories for VEGA SLIM:

Terminal box IP44

- Material: PC
- Voltage: 450V
- Rated current: 6A
- Wiring Capacity: 0.5-4.0mm²
- Cat. Number: **31071**



Terminal box IP65

- Material: Polypropylene 94-V2 grade
- Sunscreen Rating: Sun Protection(UV)
- Voltage: 450V
- Rated current: 10A
- Terminal Blocks: 3p screw type
- Metal Part: Plated Brass/Steel Spring
- Wiring Capacity: 0.5-2.5mm²
- Cat. Number: **31070**



Cable connector IP68

- Rated operational voltage:AC250V
- Rated operational Ampere(A):≤30A
- Material: flame retardant/Anti UV nylon(PA66)
- Crimping terminals: Nickle-plated brass
- Withstand voltage (normal temperature):3KV
- Operating temperature range: -40°C~+105°C
- Wiring Capacity: 0.5-2.5mm²
- Cat. Number: **31072**



TECHNICAL SPECIFICATION


OUTDOOR- LED FLOODLIGHTS

ELMARK[®]

The Brand of Electricity

Barcodes:

3800131208255	98VEGA150SLIM
3800131208262	98VEGA200SLIM

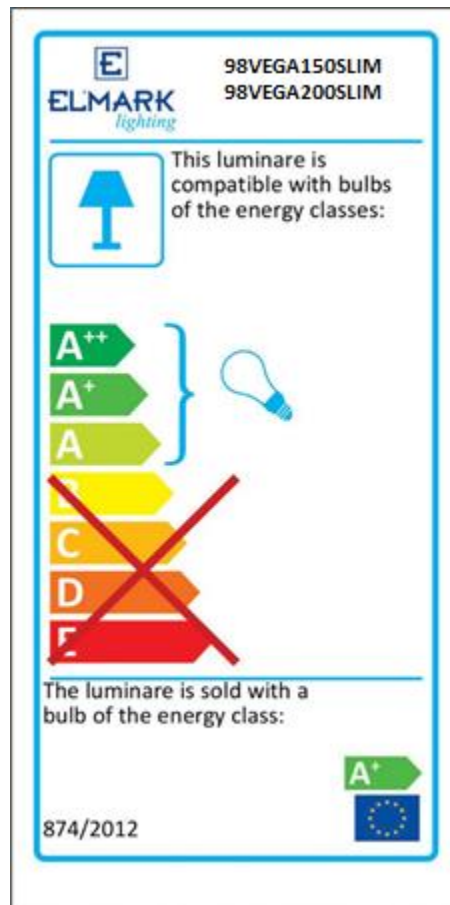

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-2-5 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

EN 50581:2012

CE RoHS COMPLIANT