

ELMARK[®]


The Brand of Electricity

FLEXIBLE DOUBLECOAT CORRUGATED PIPE



TECHNICAL DATA:

- Material- HDPE;
- Compression resistance- 450 N/ 5 cm;
- Colour- red
- Minimum bending radius: 350 mm;
- Temperature assembly resistance: -5 - +60 °C;
- Halogen free

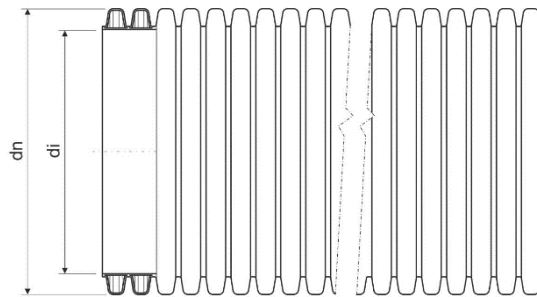

Type	Inner Diameter Φ (mm)	Outer Diameter Φ (mm)	Packing (m)	Catalogue number
Flexible doublecoat corrugated pipe	52	63	25	M006017

