

LED WORKLAMP SMD



Technical data

<i>Power:</i>	10W
<i>Nominal voltage:</i>	100-240VAC
<i>Power supply:</i>	Low-voltage, direct-current device – Waterproof driver
<i>Time of battery work:</i>	100% light – 2h; 50% - 4h
<i>LED Driver:</i>	mounted in the body
<i>LED type:</i>	SMD
<i>Light source:</i>	SMD2835
<i>Luminous flux:</i>	600lm
<i>Color temperature:</i>	4000K
<i>Beam angle:</i>	110°
<i>Colour rendering index:</i>	Ra≥80
<i>Protection against dust and moisture:</i>	IP44
<i>Housing:</i>	Aluminium
<i>Colour of the housing:</i>	Yellow; Green
<i>Long life:</i>	20000 hours
<i>Ambient temperature:</i>	-30°C to +65°C

Features

- Suitable for instant need of light, when its necessary
- Rechargeable battery
- With adaptor and car charger – 12V
- All-round rotation 360°
- Any angle hovers
- Wide distribution of even and stable light
- Economic - low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Voltage supply fluctuations do not affect the normal operation of the floodlights


Areas of application

- Warehouses
- Production facilities
- Car services
- Outdoor camping's
- Compact for put in bag– outdoor partner

Variants and Dimensions

Watt	Whole fixture lumens (lm)	Colour temp. (k)	Colour body	Size (mm)			Catalogue number	Packing (pcs)
				Length	Width	Height		
10W	600	4000	Yellow	242	25	215	98FLOOD10Y	1
10W	600	4000	Green	242	25	215	98FLOOD10G	1

Energy efficiency

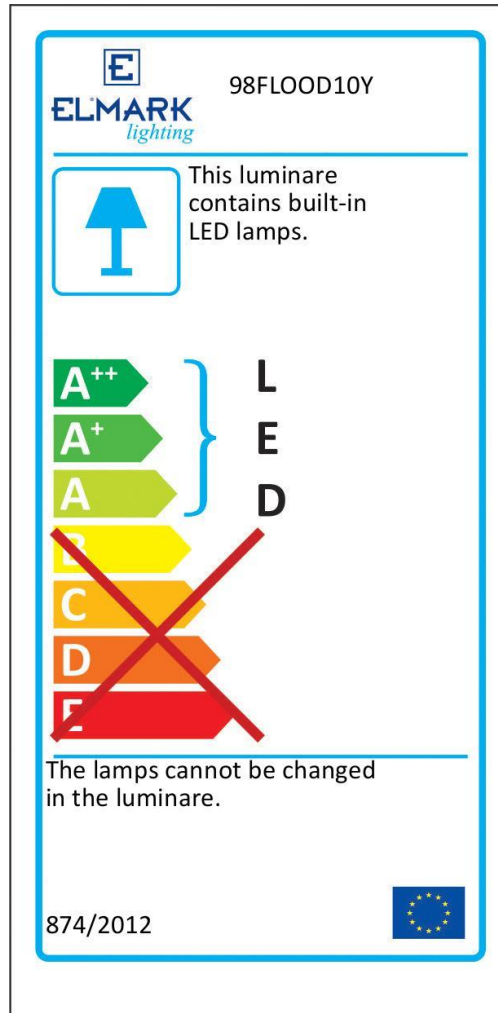

Barcodes

3800131201430	98FLOOD10Y
3800131201447	98FLOOD10G

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 • 60598-2-5 •

