

FACADE LIGHTING

Wall recessed fixtures- GRF9620/21



Technical data

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	3W; 6W
<i>Driver:</i>	Mounting in the body
<i>LED type:</i>	OSRAM LED
<i>Colour temperature:</i>	4000-4300K;
<i>Colour rendering index:</i>	Ra≥80
<i>Operating temperature:</i>	-20° ÷ + 65°C
<i>Switch on/off:</i>	15 000h
<i>Long life:</i>	30 000h
<i>Housing:</i>	Aluminium
<i>Body colour:</i>	Dark grey
<i>Installation:</i>	Recessed outdoor wall mounting
<i>Protection against dust and moisture:</i>	IP54


Features

- Low power consumption
- Highly efficient replacement of conventional lighting fixtures
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission
- Compact size

Area of application

- Suitable for outdoor use
- Additional, aesthetic, spectacular, architectural lighting for gardens, parks, yard or other outdoor spaces

Variants and dimensions

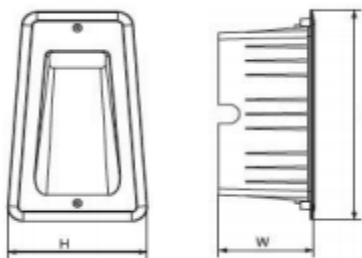


Watt	Led chip lumens (lm)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size (mm)			Catalogue number	Packing (pcs)
					L	W	H		
3W	520	480	4000-4300	Dark grey	220	90	133	9620LEDW	12
6W	360	260	4000-4300	Dark grey	148	58	89	9621LEDW	12

Barcodes

3800131186508	9620LEDW
3800131186515	9621LEDW

Energy efficiency

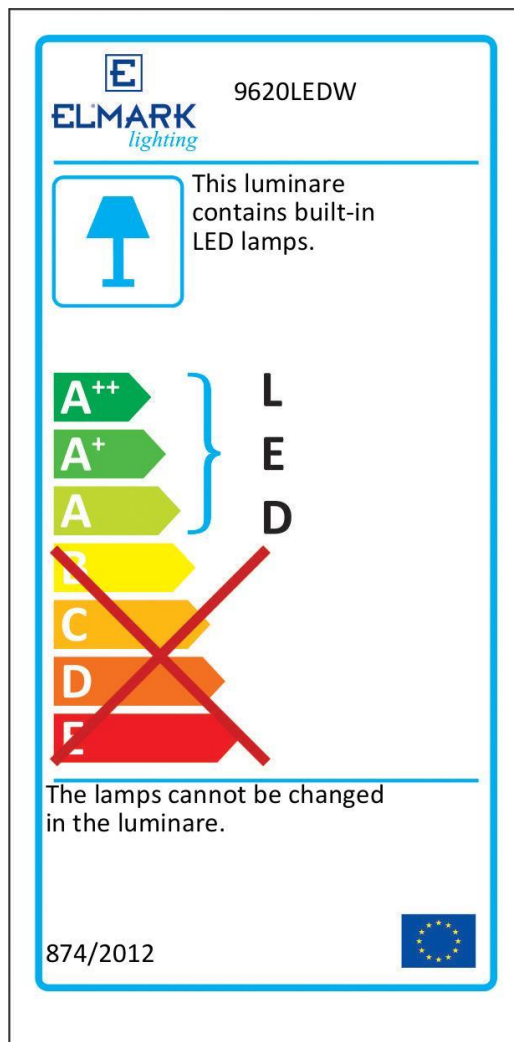

Standards

• EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 •

