

## LED CEILING FIXTURE WITH MOTION SENSOR SENSOR LIGHT



### Technical data:

Power:	12W
Rated voltage:	230V; 50-60Hz
Colour temp.:	4000K
Power Supply:	control gear, DC device-driver
Type of light source:	LED
Light chip:	EPISTAR TAIWAN
Colour rendering index:	Ra≥80
Average Lifetime:	30 000h
Body:	Polycarbonate
Colour of the body:	White; Black
Installation:	Surface mounting
Protection against dust and moisture:	IP40
Sensor specifications:	<ul style="list-style-type: none"><li>▪ Detection distance: max 6m</li><li>▪ Time delay: 10sec ± 3sec to 3 min ± 30sec</li><li>▪ Ambient Light: &lt; 3-2000LUX</li></ul>


## Features

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

## Area of application


- Building entrances
- Stair vestibules
- Parking garage
- Hotels
- Schools
- Hospitals
- Kitchen premises

## Variants and dimensions

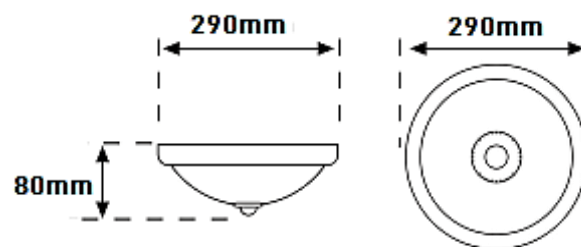

Catalogue number	Watt	Whole fixture lumens	Colour temp.	Colour body	Size (mm)			Barcodes
		(lm)	(K)		Length	Width	Height	
99DS401	12	800	4000	White	290	290	80	3800131196019


## Energy efficiency










**ELMARK**  
*lighting*

99DS401

---




This luminaire contains built-in LED lamps.

	}	L E D
		
		
		
		
		
		

---

The lamps cannot be changed in the luminaire.

874/2012



## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • 60598-1 • 13032-4 •

