

EL[®]MARK

The Brand of Electricity

NINA LUMINAIRE WITH LED TUBES T8 STELLAR



Technical data:

- Rated voltage: 230V / 50/60Hz
- Power: 1x9W; 2x9W
- Colour temperature: 4000K; 6400K
- Colour rendering index: Ra≥80
- Type of light source: LED tube T8
- Base: G13
- Housing: White powder painted steel
- Diffuser: ABS
- Reflector: ABS plastic grid
- Average life: 15000 hours, provided by the LED light sources
- Switch on/off: 20000
- Protection against dust and moisture: IP21

Features:

- Replacement of conventional fluorescent tubes with highly efficient LED tubes
- Installation options: surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and functional light distribution

Area of application:

- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools


TECHNICAL SPECIFICATION

LED FIXTURES


ELMARK[®]

The Brand of Electricity

Variants and Dimensions:

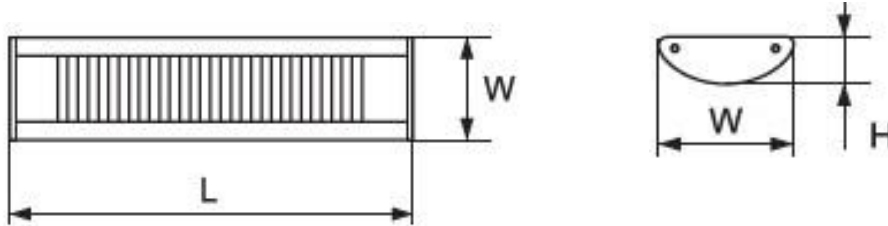

Watt	Whole fixture lumens	Colour temp.	Colour body	Size (mm)			Catalogue number
				Length	Width	Height	
1X9	585	6400	white	740	118	48	92LED118LEDCW
1X9	585	4000	white	740	118	48	92LED118LEDW
2X9	1170	6400	white	740	160	55	95LED218CW
2X9	1170	4000	white	740	160	55	95LED218W

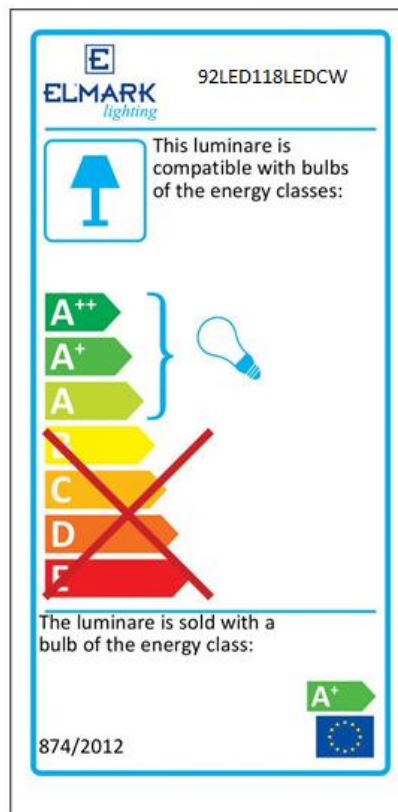

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •



www.elmarkholding.eu