

TECHNICAL SPECIFICATION

Downlight fixtures for MHL - GL208



Technical data

- Nominal voltage: 230V / 50-60Hz
- Lamp power : 150W
- Lampholder designation: Rx7s - Leads: Cu tinned, stranded conductors 1mm², Si-insulation, length: 200mm; contact distance: 132mm
- Type of light source (not included commercial kit): Metal Halide Lamp 150W
- Operating mode: Electronic control gear or Magnetic control gear (not included commercial kit)
- Body material: Sheet steel
- Diffuser : Transparent glass with matt dots
- Reflector : Aluminium
- Type of installation : Recessed mounting for indoor use
- Body color : white, satin nickel
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F


Areas of application

- Commercial buildings
- Offices
- Entertainment industry

Product benefits


- Lightweight body
- Simple appearance
- Easy installation

Variants and dimensions

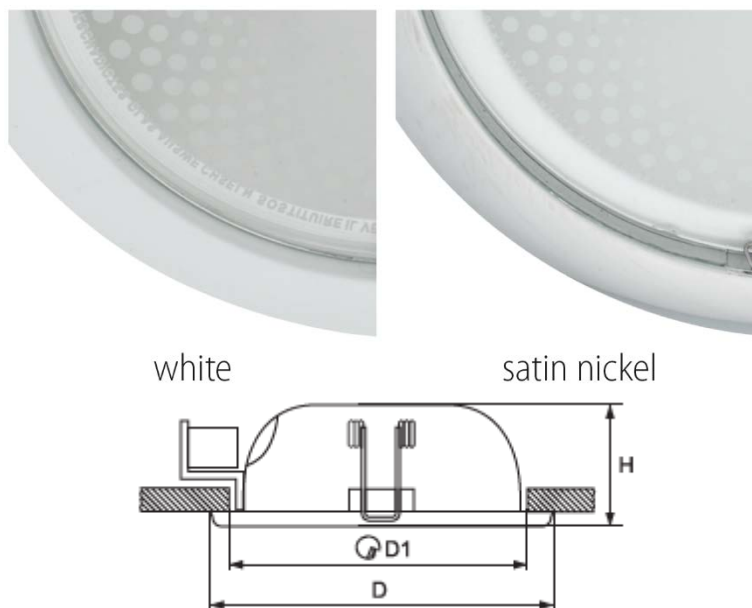

Model	Size (mm)			Colour body	Catalogue number	Packing (pcs)
	Diameter	Height	Diameter 1			
GL 208	225	110	210	white	9299208M/W	12
GL 208	225	110	210	satin nickel	9299208M/SN	12

Energy efficiency

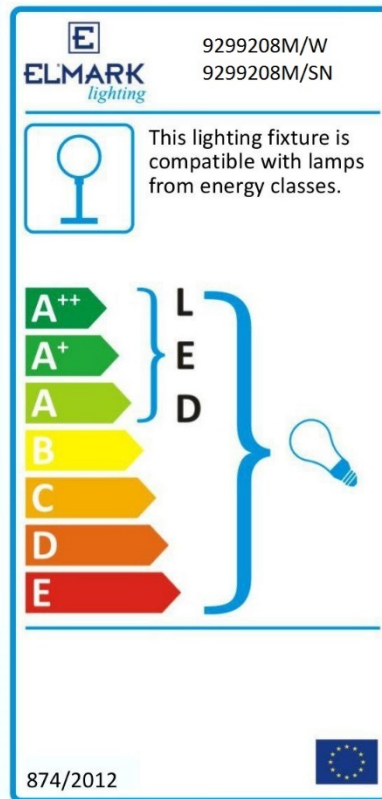

Barcodes

Barcode	Catalogue number
3800131162694	9299208M/W
3800131179562	9299208M/SN

Standards

EN 60598-1

EN 60598-2-2

