

TECHNICAL SPECIFICATION

Spotlights SA-71/91



Technical data

- Operating voltage: 12V
- Lamp power: max.50W
- Material: Aluminum alloy
- Installation: Indoor recessed mounting
- Lampholder (commercial kit): GU5.3 silicone cable 0,75 mm² and a length of 100mm
- Light source(optional): Recommended MR- 16 lamp, socket GU5.3, Voltage - 12V, diameter - 50mm
- Body color : satin nickel/gold, satin nickel/chrome, pearl chrome/chrome, satin gold/chrome, graphite/chrome, graphite/gold
- Model options: fixed (SA-71) / moveable (SA-91)
- Dust and humidity protection level: IP20
- Protection against electric shock: III
- Protection against ignition and fire: Class F

Note: With the purchase of additional lampholder GU10, spotlight can be used with 230V GU10 lamps.


Areas of application

- Hotels
- Restaurants
- Shops
- Conference Halls
- Corridors

Product benefits

- Compact size
- Variety of colors
- Ideal for flexible and attractive architectural solutions

Variants and dimensions

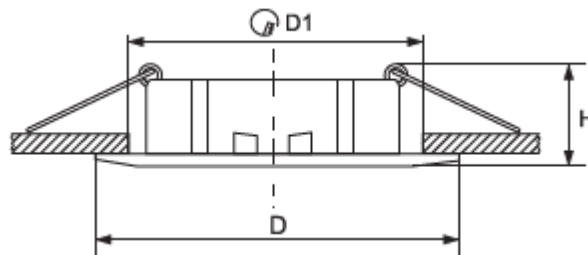



- Fixed spotlight – SA-71

Model	Size (mm)			Colour body	Catalogue number	Packing (pcs)
	Diameter	Height	Diameter 1			
SA-71	79	25	60	satin nickel/gold	9271/SN-G	100
SA-71	79	25	60	satin nickel/chrome	9271/SN-CH	100
SA-71	79	25	60	pearl chrome/chrome	9271/PCH-CH	100
SA-71	79	25	60	satin gold/chrome	9271/SG-CH	100
SA-71	79	25	60	graphite/chrome	9271/GR-CH	100
SA-71	79	25	60	graphite/gold	9271/GR-G	100

- Moveable spotlights – SA-91

Model	Size (mm)			Colour body	Catalogue number	Packing (pcs)
	Diameter	Height	Diameter 1			
SA-91	82	25	73	satin nickel/gold	9291/SN-G	100
SA-91	82	25	73	satin nickel/chrome	9291/SN-CH	100
SA-91	82	25	73	pearl chrome/chrome	9291/PCH-CH	100
SA-91	82	25	73	satin gold/chrome	9291/SG-CH	100
SA-91	82	25	73	graphite/chrome	9291/GR-CH	100
SA-91	82	25	73	graphite/gold	9291/GR-G	100

Energy efficiency

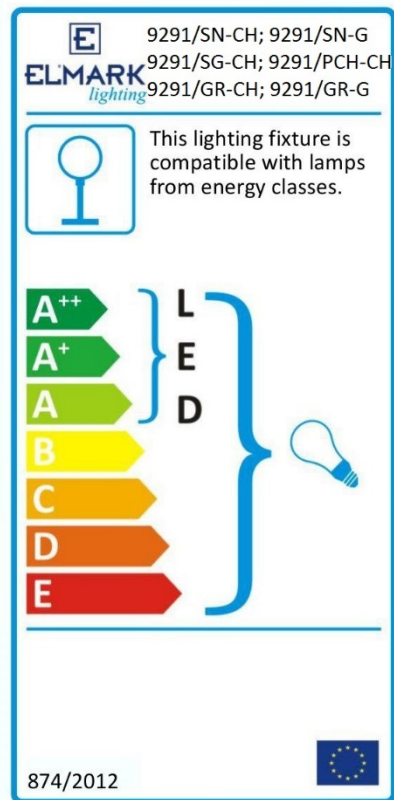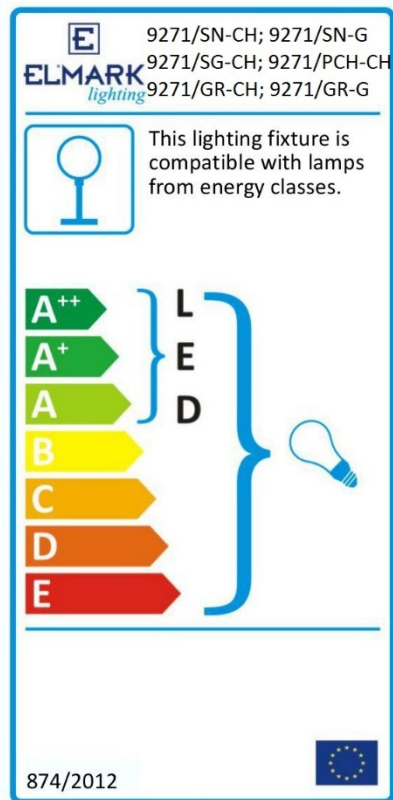

Barcodes

Barcode	Catalogue number
3800131161536	9271/SN-G
3800131161543	9271/SN-CH
3800131161550	9271/PCH-CH
3800131161567	9271/SG-CH
3800131161574	9271/GR-CH
3800131161581	9291/SN-G
3800131161598	9291/SN-CH
3800131161604	9291/PCH-CH
3800131161611	9291/SG-CH
3800131161628	9291/GR-CH

Standards

EN 60598-1

EN 60598-2-2

