

## TECHNICAL SPECIFICATION

### BELLA Luminaire with LED tubes STELLAR



#### Technical data

- Rated voltage : 230V/50Hz
- Type of light source : LED tube
  - T8 9W 585Lm
  - T8 18W 1170Lm
  - T8 22W 1430Lm
- Protection against dust and moisture : IP65
- Housing: Grey polycarbonate
- Reflector : white powder painted sheet steel
- Diffuser : ribbed polycarbonate
- Base: G13
- Long life : 15,000 hours
- Colour rendering index: Ra≥80


## **Areas of application**

- Damp areas
- Dusty environment
- Kitchen premises
- Roofed outdoor areas

## **Product benefits**


- Replacement of conventional fluorescent tubes with highly efficient LED tubes
- Surface installation on any ceilings
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and functional light distribution

## Variants and dimensions

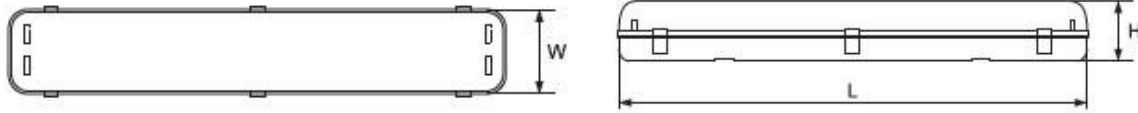

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
1X9W	6200-6500	grey	670	86	100	9BR109LEDCW	12
1X9W	4000-4300	grey	670	86	100	9BR109LED	12
2X9W	6200-6500	grey	670	131	100	9BR209LEDCW	9
2X9W	4000-4300	grey	670	131	100	9BR209LED	9
1X18W	6200-6500	grey	1270	86	100	9BR118LEDCW	9
1X18W	4000-4300	grey	1270	86	100	9BR118LED	9
2X18W	6200-6500	grey	1270	131	100	9BR218LEDCW	6
2X18W	4000-4300	grey	1270	131	100	9BR218LED	6
1X22W	6200-6500	grey	1570	106	110	9BR122LEDCW	6
1X22W	4000-4300	grey	1570	106	110	9BR122LED	6
2X22W	6200-6500	grey	1570	166	110	9BR222LEDCW	4
2X22W	4000-4300	grey	1570	166	110	9BR222LED	4

## Energy efficiency

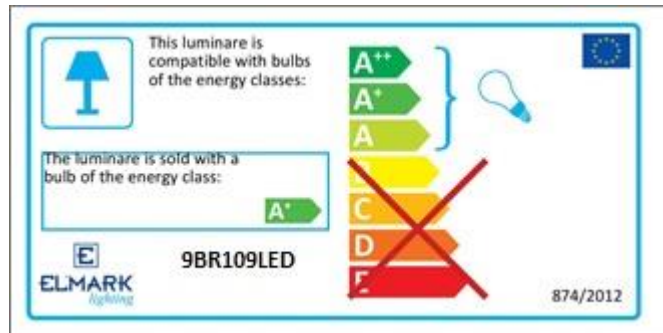

## Barcodes

Barcode	Catalogue number
3800131192448	9BR109LEDCW
3800131192455	9BR109LED
3800131192462	9BR209LEDCW
3800131192479	9BR209LED
3800131192486	9BR118LEDCW
3800131192493	9BR118LED
3800131192509	9BR218LEDCW
3800131192516	9BR218LED
3800131192523	9BR122LEDCW
3800131192547	9BR122LED
3800131192554	9BR222LEDCW
3800131192561	9BR222LED

## Standards

EN 60598-1

EN 60598-2-1



