

TECHNICAL SPECIFICATION

LED Cabinet Light – NELI Luminaire SMD



Technical data

- Power: 9W/ 18W/ 36W
- Color temperature: 4000K
- Rated voltage: 230V/ 50-60Hz
- Type of LED: SMD2835
- Light source: Epistar
- Luminous flux:
 - 9W - 720lm
 - 18W - 1440lm
 - 36W – 2880lm
- Protection against dust and moisture: IP40
- Housing: polycarbonate
- Body: Aluminium
- Reflector: plastic mat cover

- Long life : 30000h
- Beam angle: 120°
- Colour rendering index: Ra≥80


Areas of application

- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools

Product benefits

- Safety, low voltage operation
- Replacement of conventional fluorescent tubes with highly efficient LED Strip
- Installation: surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and uniform light distribution

Variants and dimensions

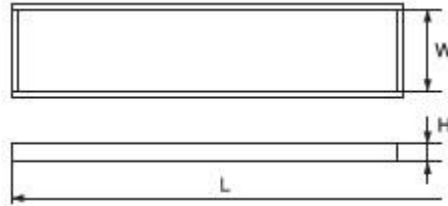

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
9W	720	4000	white	600	75	25	9NELI9LED	1
18W	1440	4000	white	1200	75	25	9NELI18LED	1
36W	2880	4000	white	1476	75	25	9NELI36LED	1

Energy efficiency

ELMARK lighting 9NELI9LED

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

ELMARK lighting 9NELI18LED

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

ELMARK lighting 9NELI36LED

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

Barcodes

Barcode	Catalogue number
3800131192264	9NELI9LED
3800131192271	9NELI18LED
3800131192288	9NELI36LED

