

## TECHNICAL SPECIFICATION

### Moisture-proof distribution boxes for surface mounting - IP 55




#### Description

The distribution boxes are designed for mounting in newly built buildings or buildings in reconstruction. They are a module box with mounted protective devices of the given flats electrical installation current circles. They are supplied with transparent door for each row opening upwards to 90°. They are made of white non-self-extinguishing plastic, resistant to heat and high temperature. The special design of the lids and gaskets provides IP code: IP55. The mounted device in the box is protected from indirect contact to the current leading parts. They are offered with DIN-rail for device mounting and terminal strips for the neutral and earthing conductor joining. For direct wall mounting with screws.

#### Technical data

- Maximum insulation voltage: 690V; 50Hz
- Flame retardance: V-0
- IP code: IP55
- Door colour: Transparent
- Mounting type: Surface

## Variants and dimensions

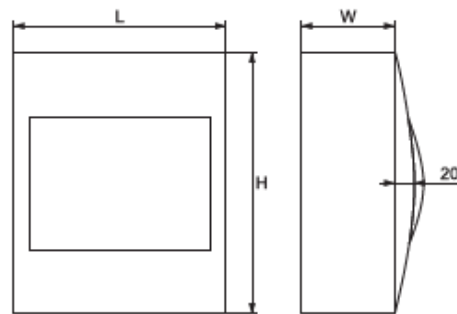

Type	Number of rows	Module capacity (number of devices)	IP	Dimensions (mm)			Packing / Box	Catalogue number
				L	H	W		
WP4	1	4	55	127	214	93	1 / 20	60100
WP6	1	6	55	162	214	93	1 / 20	60101
WP8	1	8	55	216	214	93	1 / 20	60102
WP12	1	12	55	270	214	93	1 / 12	60103
WP18	1	18	55	378	233	93	1 / 8	60104
WP24	2	24	55	340	288	93	1 / 8	60105

### Standards:

EN 62 208

EN 60439-1

EN 60 439-3

