

TECHNICAL SPECIFICATION

LENA – V with LED tubes



Technical data

- Rated voltage : 230V/50Hz
- Type of light source : LED tube
 - T8 10W 850Lm
 - T8 18W 1700Lm
- Protection against dust and moisture : IP21
- Housing: white powder painted sheet steel
- Reflector : aluminum double parabolic mirror
- Long life : 30000 hours
- Base: G13
- Colour rendering index: Ra≥80


Areas of application

- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools

Product benefits

- Replacement of conventional fluorescent tubes with highly efficient LED tubes
- Installation options: built-in suspended ceiling / surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and functional light distribution

Variants and dimensions

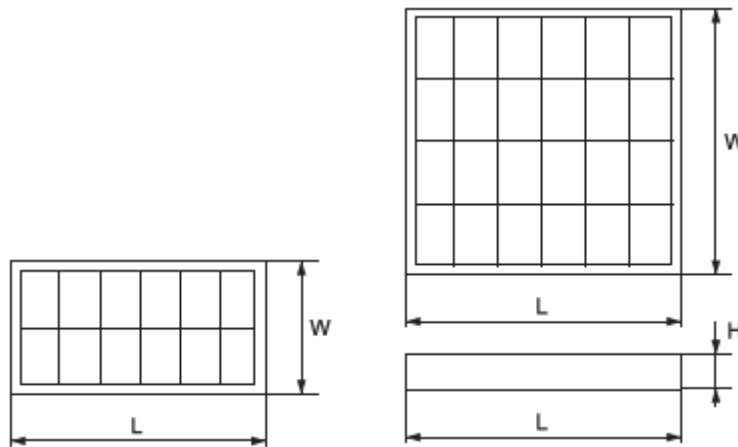


- LENA-V BM (recessed mounted luminaire) with LED tubes

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
2X10W	6400	white	595	295	70	9LBM260LEDCW	1
2X10W	4000	white	595	295	70	9LBM260LED	1
4X10W	6400	white	595	595	70	9LBM460LEDCW	1
4X10W	4000	white	595	595	70	9LBM460LED	1
2X18W	6400	white	1195	295	70	9LBM2120LEDCW	1
2X18W	4000	white	1195	295	70	9LBM2120LED	1

- LENA-V OM (surface mounting) with LED tubes

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
2X10W	6400	white	630	330	70	9LOM260LEDCW	1
2X10W	4000	white	630	330	70	9LOM260LED	1
4X10W	6400	white	630	630	70	9LOM460LEDCW	1
4X10W	4000	white	630	630	70	9LOM460LED	1
2X18W	6400	white	1230	330	70	9LOM2120LEDCW	1
2X18W	4000	white	1230	330	70	9LOM2120LED	1

Energy efficiency

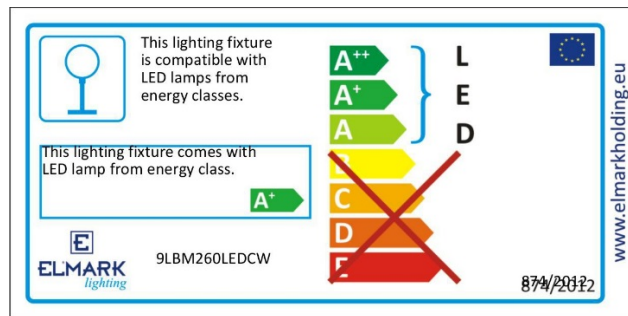

Barcodes

Barcode	Catalogue number
3800131189257	9LBM260LEDCW
3800131189264	9LBM260LED
3800131189271	9LBM460LEDCW
3800131189288	9LBM460LED
3800131189295	9LBM2120LEDCW
3800131189301	9LBM2120LED
3800131189318	9LOM260LEDCW
3800131189325	9LOM260LED
3800131189332	9LOM460LEDCW
3800131189349	9LOM460LED
3800131189356	9LOM2120LEDCW
3800131189363	9LOM2120LED

Standards

EN 60598-1

EN 60598-2-1

