



The Brand of Electricity

GRF LED RECESSED FIXTURE

96GRF2



GENERAL INFORMATION »

- ∴ Rated voltage: 12VDC/230VAC 50-60Hz
- ∴ Power: 1W
- ∴ Light source: SMD2835
- ∴ Colour temperature: 3000K/4000K
- ∴ Body: Stainless steel + Aluminum + Tempered glass
- ∴ Operating temperature: -20°C÷+65°C
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off > 20 000
- ∴ Life time: 30 000h
- ∴ Installation: recessed outdoor ground mounting
- ∴ Protection against dust and moisture: IP65
- ∴ Type: Ground recessed fixture

FEATURES »

- ∴ Highly efficient replacement of conventional lighting fixtures
- ∴ Low power consumption
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Low heat emission
- ∴ Compact size

APPLICATION »

- ∴ Suitable for outdoor use
- ∴ Additional, aesthetic, directional, architectural lighting for buildings, facades, fences' columns and other outdoor sites
- ∴ Places with high level of moisture



TECHNICAL SPECIFICATION SHEET

PRODUCT DETAILS »

| Catalogue number | Watt (W) | Whole fixture lumens (Lm) | Rated voltage (V) | Colour temp. (K) |
|------------------|----------|---------------------------|-------------------|------------------|
| 96GRF2/130220WW | 1W | 90 | 220AC | 3000 |
| 96GRF2/130220 | 1W | 90 | 220AC | 4000 |
| 96GRF2/13012WW | 1W | 90 | 12DC | 3000 |
| 96GRF2/13012 | 1W | 90 | 12DC | 4000 |

DIMENSIONS »

| Model | Length (mm) | Width (mm) | Height (mm) |
|-----------------|-------------|------------|-------------|
| 96GRF2/130220WW | 42 | 42 | 80 |
| 96GRF2/130220 | 42 | 42 | 80 |
| 96GRF2/13012WW | 42 | 42 | 80 |
| 96GRF2/13012 | 42 | 42 | 80 |

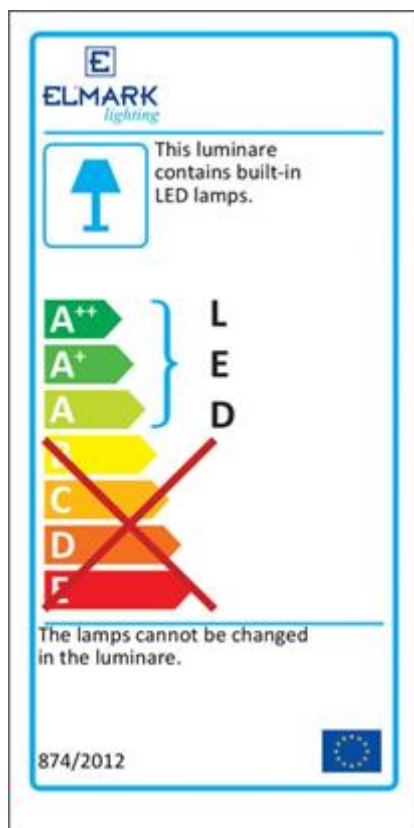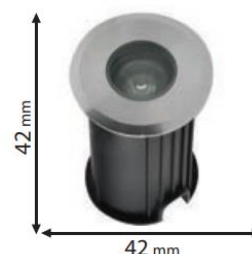

ADDITIONAL INFORMATION »

| Catalogue number | Barcode |
|------------------|---------------|
| 96GRF2/130220WW | |
| 96GRF2/130220 | 3800131249746 |
| 96GRF2/13012WW | |
| 96GRF2/13012 | 3800131249753 |