


SAVE VOLTAGE WIRELESS SMART HOME MODULE





TECHNICAL SPECIFICATION

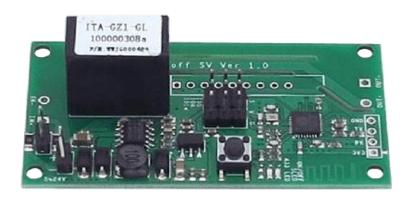

DESCRIPTION

SV is a low voltage switch. The low voltage light switch supports 5-24V power supply. Power supply separation enables it to control both AC and DC power. It has GIPO reserved to support secondary development. This product does not have 433 RF function and shell.SV low voltage WiFi switch is an affordable device that provides customers with smart home control. The low voltage WiFi switch is a WiFi based wireless switch that can connect to a wide range of appliances. Sonoff SV low voltage remote switch transmits data to a cloud platform through the WiFi router, which enables customers to remotely control all the connected appliances, via the mobile application eWeLink. The cloud server of Sonoff SV is Amazon AWS global server.SONOFF SV low voltage wireless remote switch makes all home appliances smart. As long as the mobile has network, customers can remotely control the appliances by turning them on off from anywhere at any time. Another feature available is to set timing schedules for the appliances, which can include countdown, scheduled on/off, and can thus, help customers maintain an easy life.

The mobile application eWeLink enables customers to control the appliances easily. The iOS ver sion of the application can be downloaded in App Store while the Android version in Google Play.

FUNCTION

- Remote ON/OFF: Turn electrical devices ON/OFF from anywhere
- LAN Control: Turn on/off the device even when Wi-Fi has no Internet access.
- Low Power Supply: 5-24V DC low voltage input
- App Support: Free iOS and Android mobile App eWeLink
- Sync Status: Real-time device status provided to App
- Timing: Set scheduled/countdown timers to turn ON/OFF at specified time
- Share Control: Control your smart home together with your family
- Scene: Turn ON/OFF a gang of devices with one tap
- Smart Scene: Triggered ON/OFF by temp, hum or other environmental conditions from sensor
- Compatibility: Works perfectly with Amazon Alexa, Google Assistant, IFTTT, Google Nest

TECHNICAL DATA

Power supply: 3V button cell x 2 pcs

Battery type: CR2032Colour: Dark greyButton QTY: 6

Enclosure Material: PC V0

Dimension (LxWxH): 86x86x13.5 mm

Download eWeLink Application.

Full info for the products, instructions can be found at www.elmarkholding.eu

TECHNICAL SPECIFICATION



Catalogue	Input	Output	Packing/Box	
number	voltage	current	(pcs)	
SV	5-24V DC	1A	1	

Works with IFTTT

IFTTT helps your devices and apps work together in new ways



Voice control with Amazon Alexa & Google Assistant





5~24V power supply voltage



Tracking device status and timely remote control through APP



Fast configure SSID and password through APP



Automatic connect to server, register and update status info



Setting max 8 single or repeat timing tasks each device



Numerous WiFi smart switches - One smartphone



Reserve GIPO to support secondary development